2100

2100
1500
1000
2100
2500
HEIL
TRAILER

HEIL
TRAILER

2500

1203
3

HEIL
TRAILER

Firestone
11R22.5 152/148
FS561

ESTA
245/70R19.5 16PR

FS561
11R22.5 16PR
Firestone

5

ROADMASTER
RM185
11R22.5

1203
CAUTION
NOTICE

1203
3
1203
HEIL
TRAILER

1203
3
MAINE
SEMI PERMANENT
HEIL
TRAILER
HEIL
TRAILER

1203
HEIL
TRAILER

DEP 11 24
11-24 KVK-EPA27
11-21 PI
1203

HEIL
TRAILER
HEIGHT
11' 7"
19
DEP 11 24
11-24 KVK-EPA27
11-21 PI
WARNING
1203
3
EMERGENCY
SHUTOFF

HEIGHT
11' 7"
1203

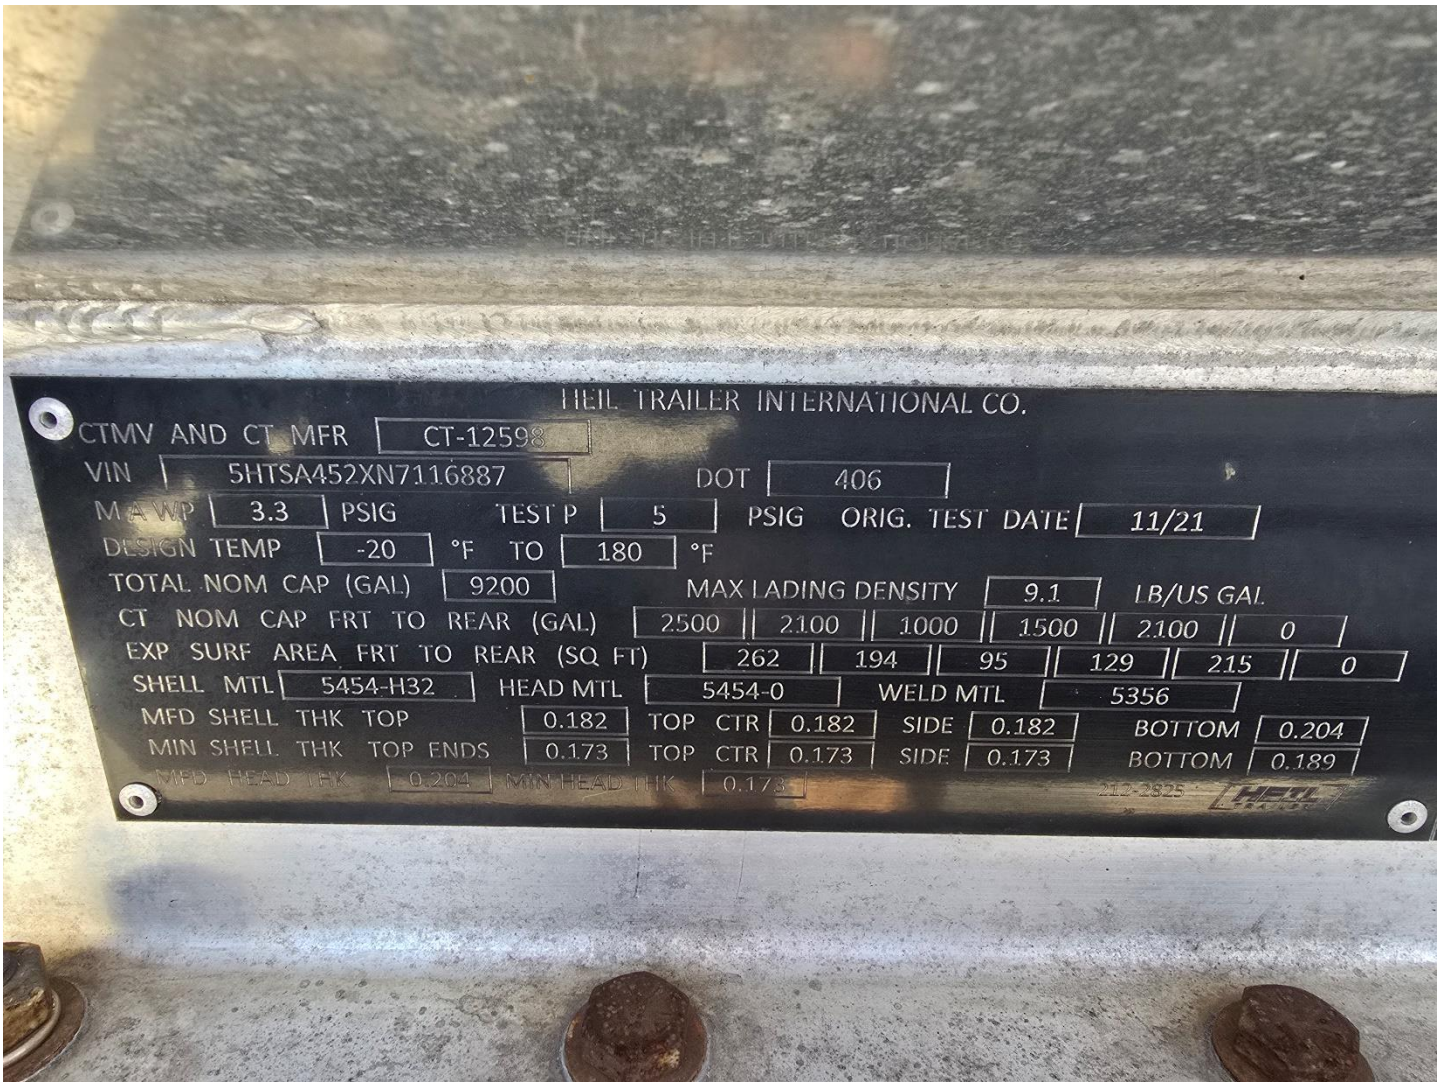
HEIL TRAILER INTERNATIONAL CO.
CTMV AND CT MFR CT-12598
VIN 5HTSA452XN7116887 DOT 406
MAWP 3.3 PSIG TEST P 5 PSIG ORIG. TEST DATE 11/21
DESIGN TEMP -20 °F TO 180 °F
TOTAL NOM CAP (GAL) 9200 MAX LADING DENSITY 9.1 LB/US GAL
CT NOM CAP FRT TO REAR (GAL) 2500 2100 1000 1500 2100 0
EXP SURF AREA FRT TO REAR (SQ FT) 262 194 95 129 215 0
SHELL MTL 5454-H32 HEAD MTL 5454-0 WELD MTL 5356
MFD SHELL THK TOP 0.182 TOP CTR 0.182 SIDE 0.182 BOTTOM 0.204
MIN SHELL THK TOP ENDS 0.173 TOP CTR 0.173 SIDE 0.173 BOTTOM 0.189
MFD HEAD THK 0.204 MIN HEAD THK 0.173
212-2825

MFD BY: HEIL TRAILER INTERNATIONAL
MONTH AND YEAR OF MANUFACTURE: 11/21
GVWR: 30844 KG (68000 LB)
GAWR:
ALL AXLES: 8310 KG (18320 LB)
WITH 11R22.5 (G) TIRES, 22.5 X 8.25 RIMS,
AT 517 kPA (75 psi) DUAL
THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VEHICLE IDENTIFICATION NUMBER: 5HTSA452XN7116887
CLASSIFICATION OF VEHICLE: SEMI TRAILER
212-2799

RIMS,
LE SAFETY
OVE.
52XN7116887
SEMI TRAILER
212-2799
CTMV MFR. AND CT MFR.
CT-12598
VIN
5HTSA452XN7116887
CTMV CERT. DATE
11/21
CT DATE OF MFR.
11/21
MAX. WEIGHT OF LADING (LBS)
58000
MAX. LOAD RATE
1300 GPM
MAX. UNLOAD RATE
400 GPM
HEATING SYS. PRESS.
N/A PSI
HEATING SYS. TEMP.
N/A °F
LINING NONE
212-2798

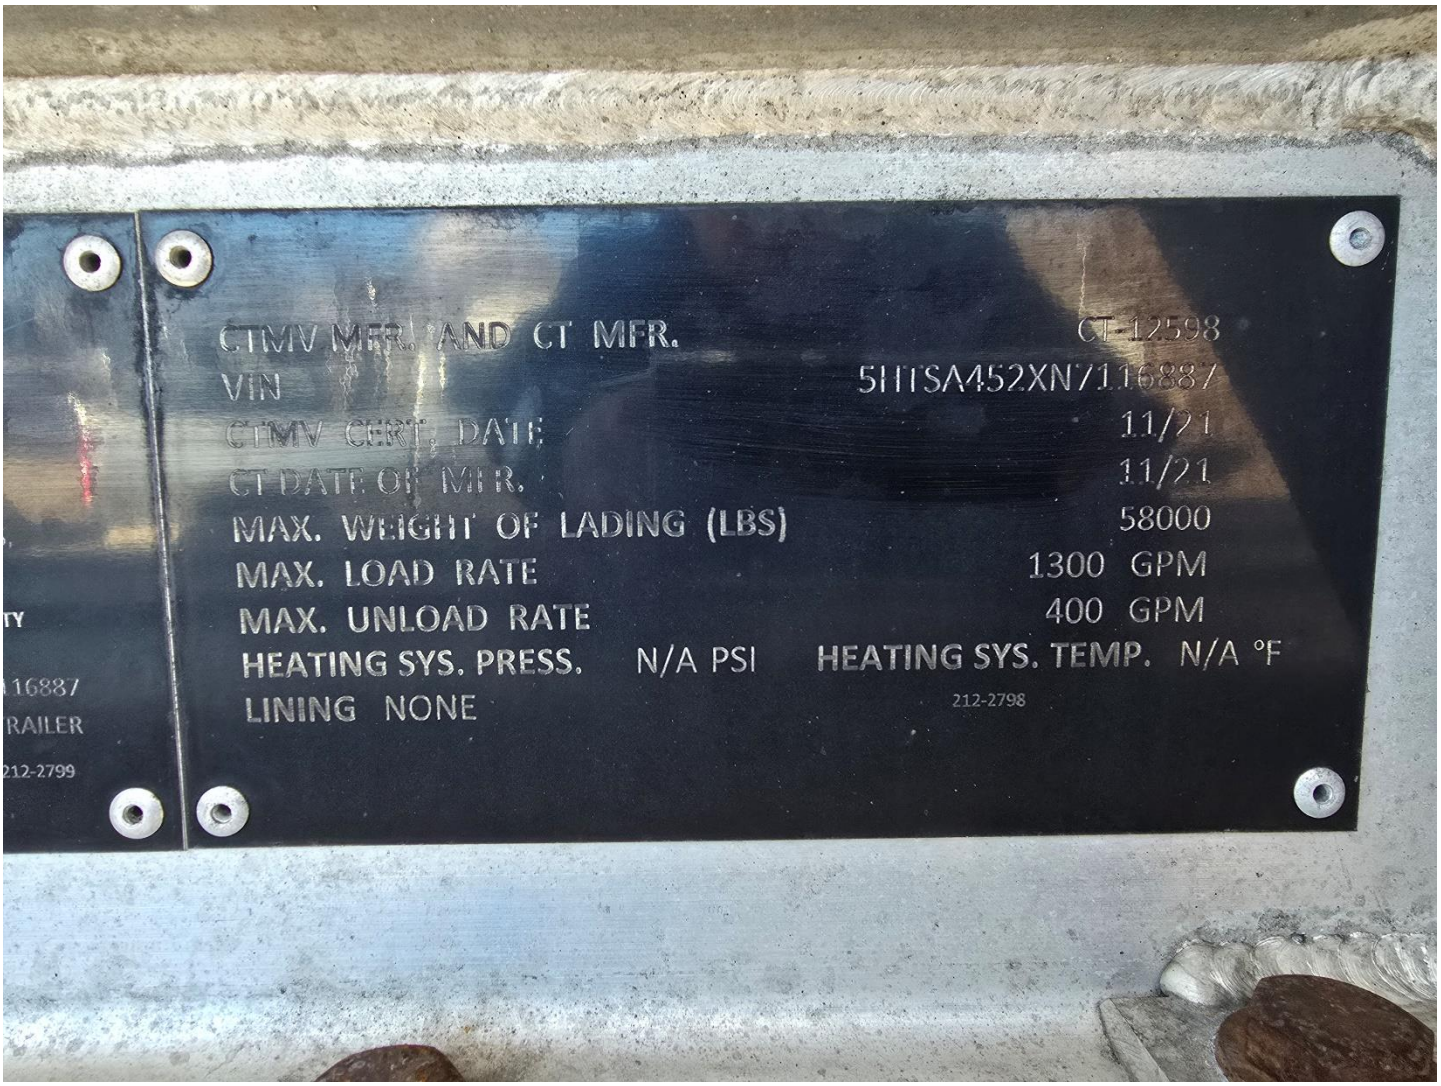
CTMV MFR. AND CT MFR. CT-12598
VIN 5HTSA452XN711688/
CTMV CERT. DATE 11/21
CT DATE OF MFR. 11/21
MAX. WEIGHT OF LADING (LBS) 58000
MAX. LOAD RATE 1300 GPM
MAX. UNLOAD RATE 400 GPM
HEATING SYS. PRESS. N/A PSI HEATING SYS. TEMP. N/A °F
LINING NONE
212-2798

MFD BY: HEIL TRAILER INTERNATIONAL
MONTH AND YEAR OF MANUFACTURE: 11/21
GVWR: 30844 KG (68000 LB)
GAWR:
ALL AXLES: 8310 KG (18320 LB)
WITH 11R22.5 (G) TIRES, 22.5 X 8.25 RIMS,
AT 517 kPA (75 psi) DUAL
THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VEHICLE IDENTIFICATION NUMBER: 5HTSA452XN7116887
CLASSIFICATION OF VEHICLE: SEMI TRAILER
EnTrans International, LLC
212-2799
GTMV.M
VIN
GTMV CE
CT DATE C
MAX. WF
MAX. LOA
MAX. UNL
HEATING S
LINING NO

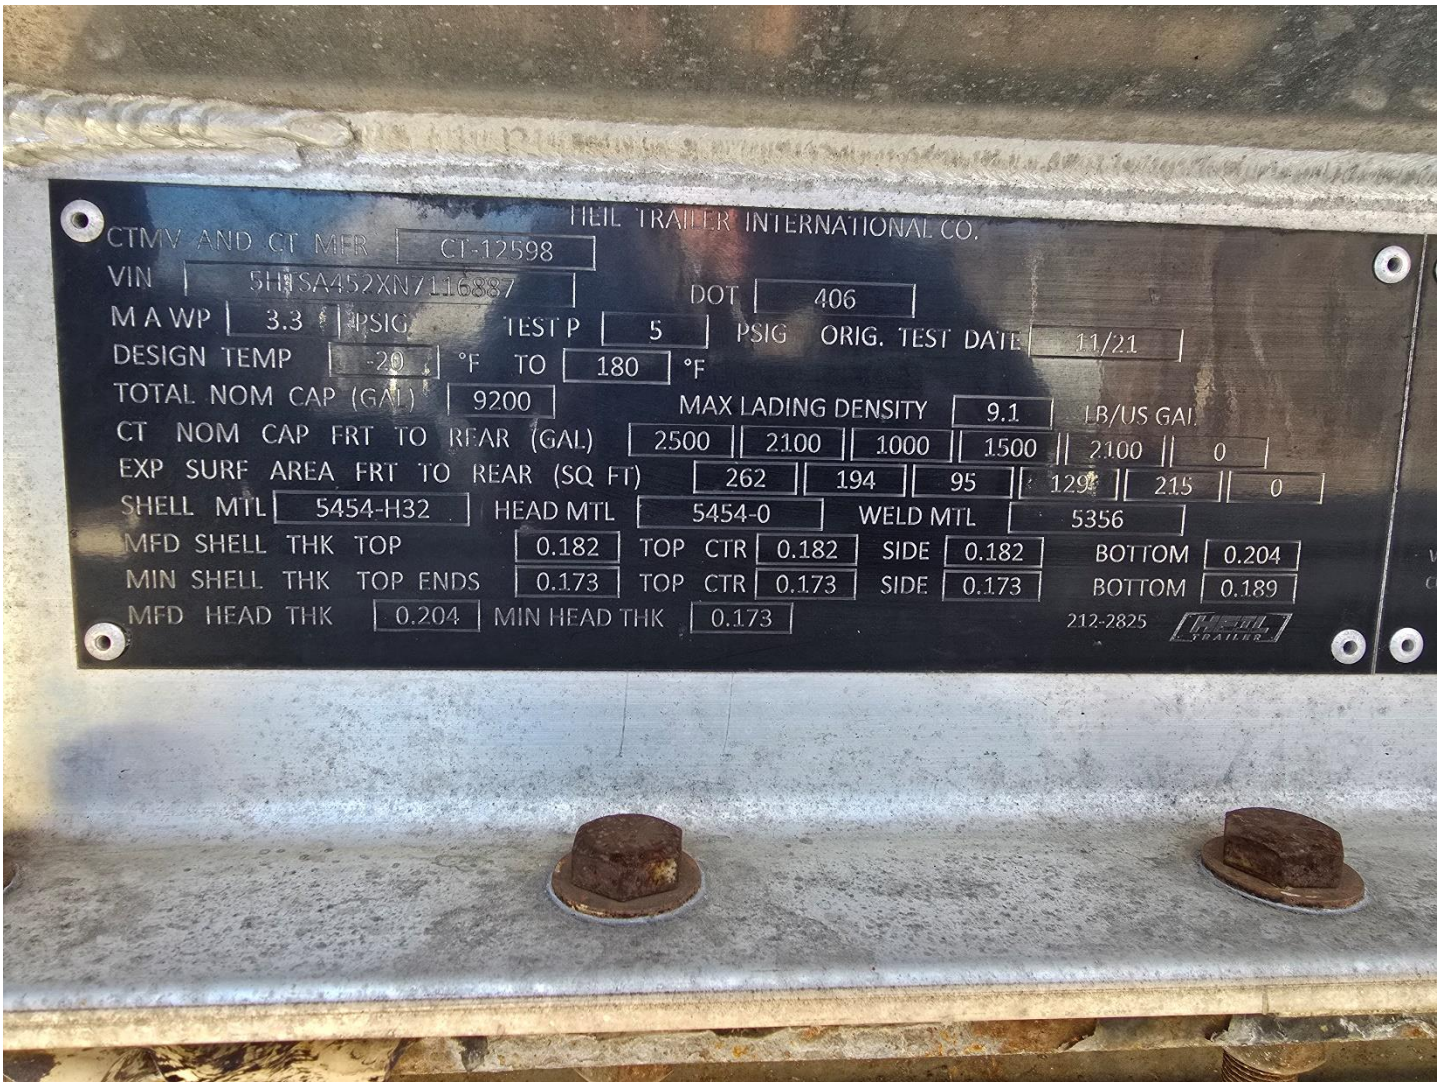
HEIL TRAILER INTERNATIONAL CO.
CTMV AND CT MFR CT-12598
VIN 5HHSA452XN/116887
DOT 406
M A WP 3.3 PSIG
TEST P 5 PSIG
ORIG. TEST DATE 11/21
DESIGN TEMP -20 °F TO 180 °F
TOTAL NOM CAP (GAL) 9200
MAX LADING DENSITY 9.1 LB/US GAL
CT NOM CAP FRT TO REAR (GAL) 2500 2100 1000 1500 2100 0
EXP SURF AREA FRT TO REAR (SQ FT) 262 194 95 129 215 0
SHELL MTL 5454-H32
HEAD MTL 5454-0
WELD MTL 5356
MFD SHELL THK TOP 0.182
TOP CTR 0.182
SIDE 0.182
BOTTOM 0.204
MIN SHELL THK TOP ENDS 0.173
TOP CTR 0.173
SIDE 0.173
BOTTOM 0.189
MFD HEAD THK 0.204
MIN HEAD THK 0.173
212-2825
HEIL TRAILER