EPA 27
NYS DEC
1993
3

EPA 27 -0422
NYS DEC -8-19
VK 0422
IP 1020
1993
3

HEATING OIL
1993
3
WE STOP AT ALL RR CROSSINGS

1993
WE STOP AT ALL RR CROSSINGS

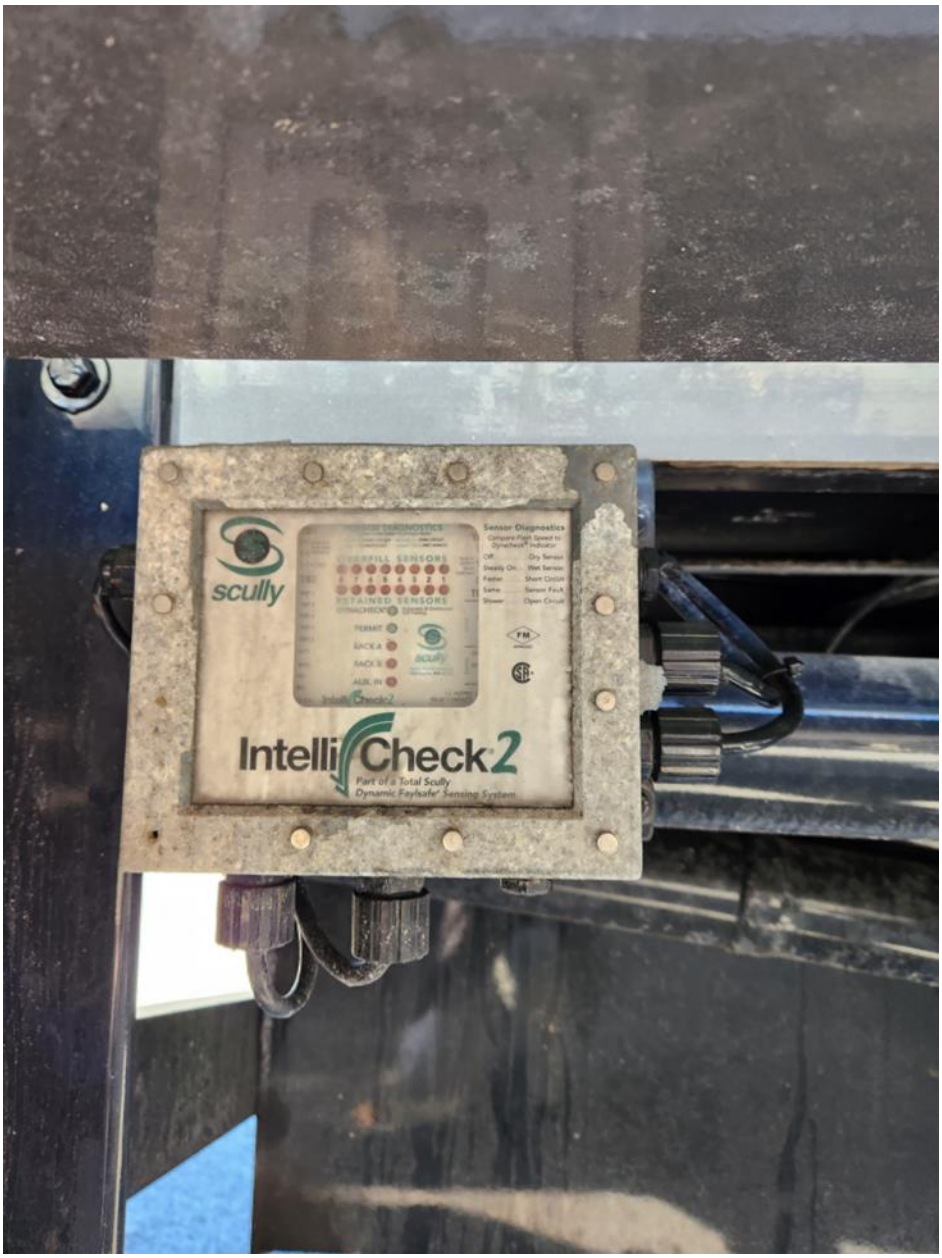
scully
IntelliCheck2
Part of a Total Scully
Dynamic Failsafe Sensing System

O'Reilly

DIESEL FUEL

PROPANE

SCULLY SYSTEM
ON
OFF

DIESEL FUEL

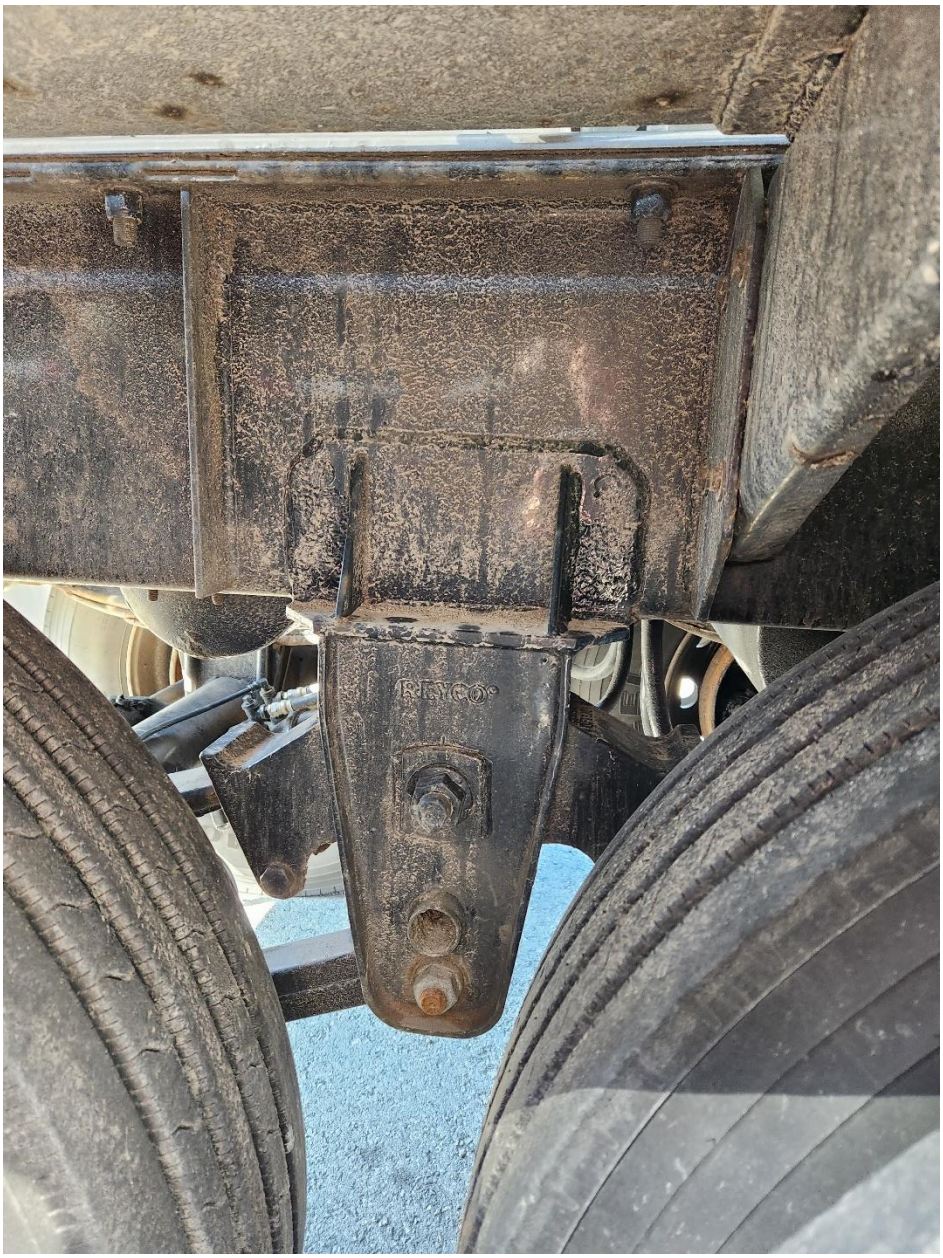
RENCO

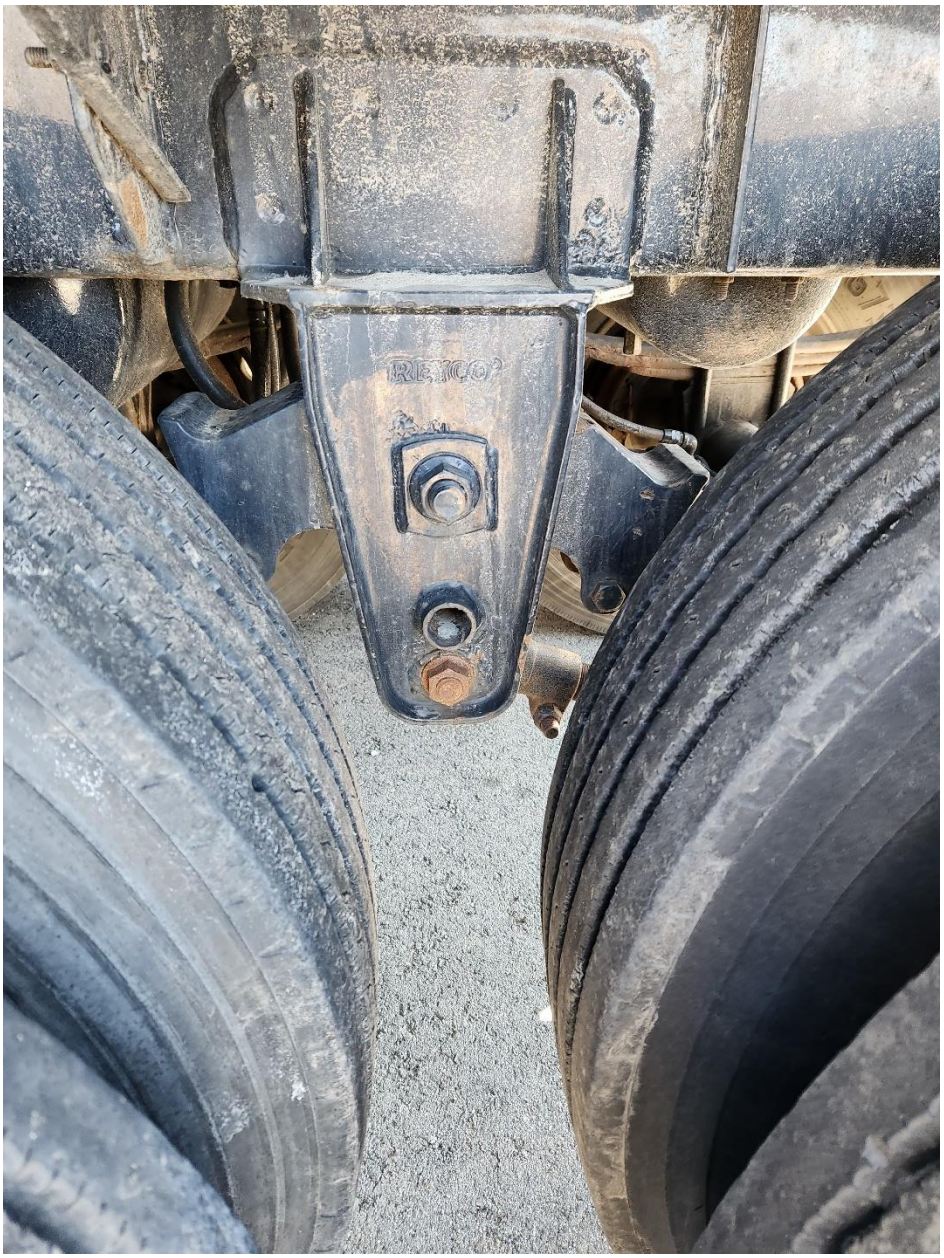
RETCO

OIL

HEIL TRAILER INTERNATIONAL, INC.
CTMV AND CT MFR
VIN 5HTAB432/XA7H58554
NO. CT INCL'D 5
CTMV CERT DATE 10-95
CT MFR & CERT DATE 10-95
MAX WEIGHT OF LADING (LBS) 58000
MAX LOADING RATE 1300 GPM @ 5 PSIG MAX
MAX UNLOAD RATE 100 GPM @ 375 PSIG MAX
HEIL

MFD BY HEIL TRAILER INTERNATIONAL, INC.
DATE OF MFG 10-95
GVWR 68000 LBS * GAWR ALL AXLES 20000 LBS
DUAL TIRES 11R22.5 G AT 95 PSI COLD
RIMS 22.5 X 8.25
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VIN 5HTAB432XX17H58554 TEST PRESS. 5 PSIG
CAPACITY 9400 GALS
TYPE SEMITRAILER
HEIL
WARRANTED UNDER CURRENT PUBLISHED WARRANTY
*BASED ON UNIFORM WEIGHT DISTRIBUTION

HEIL TRAILER INTERNATIONAL, INC.
CTMV AND CT MFR

VIN 5HTA8432XXTH58554 DOT 406 AL
MAWP 35 PSIG * TEST P 45 PSIG ORIG. TEST DATE 10-95
DESIGN TEMP 200 °F TO -40 °F
TOTAL NOM CAP (GAL) 9400 MAX LADING DENSITY 91 LB / GAL

CT NOM CAP FRT TO REAR (GAL)	3100	1200	1150	1150	2800	N/A
EXP SURF AREA FRT TO REAR (SQ FT)	305	98	105	105	270	N/A

SHELL MTL 5454-H32 HEAD MTL 5454-O WELD MTL 5556

MFD SHELL THK TOP ENDS	.188	TOP CTR	.188	SIDE	.188	BOTTOM	.204
MIN SHELL THK TOP ENDS	.173	TOP CTR	.177	SIDE	.177	BOTTOM	.189

MFD HEAD THK .245 MIN HEAD THK .196